

motia

Driver ID with Keypad

Installation guide

May 2026 Product Team



Clear, consistent steps for fitting and testing a driver ID receiver, buzzer and tracking unit.



Choose a receiver location



MOUNTING LOCATION

Find a suitable mounting location for the Keypad. You must be able to access the rear of the receiver once fitted, and it should be easy to reach from the driving seat.

Tip: check access behind the panel before drilling.

Aattach Keypad



Attach Keypad

Once a suitable location is found, Place double sided tape on the back of the Keypad,




Fit Keypad and secure cable



SECURE the Keypad

Secure the Keypad to the chosen location with a firm push then route the cable keeping it secure and as hidden as possible


Mount the buzzer

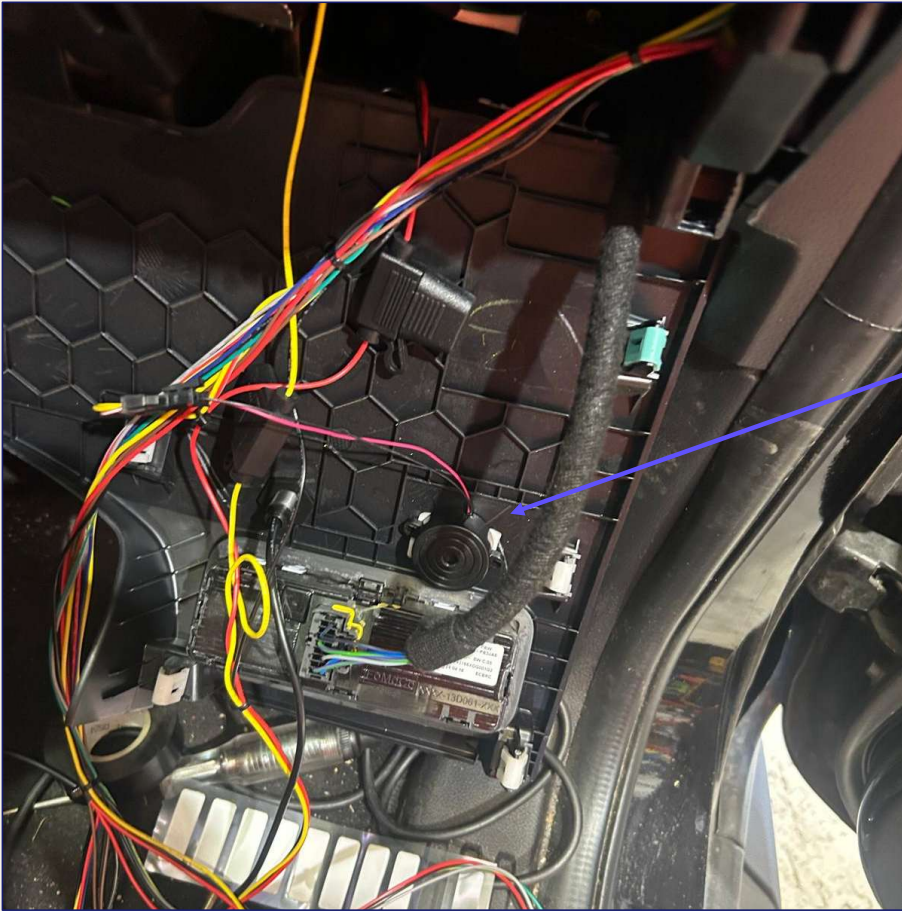

BUZZER POSITION

Mount the buzzer with double-sided tape or a cable tie to the wiring loom in a location that will be heard by the driver.

Confirm the buzzer position

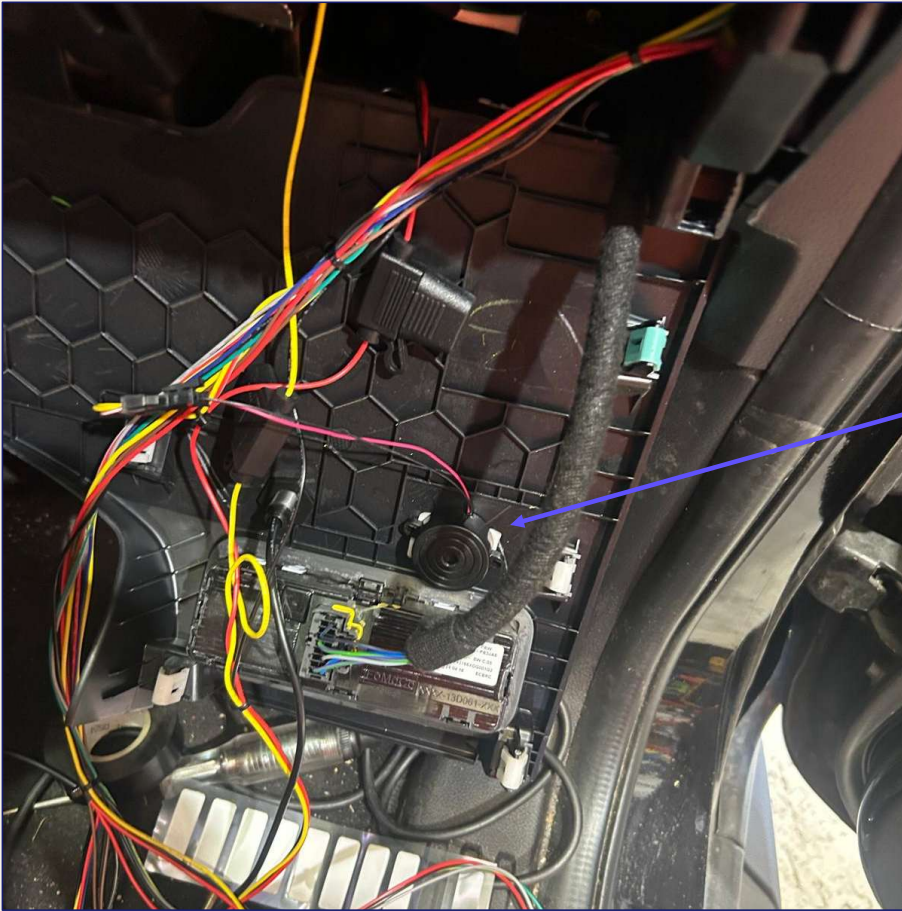

FINAL PLACEMENT CHECK

Confirm the buzzer is fixed securely and positioned close enough to the driver to be audible once the panels are re-fitted.

Connect the power cable




TRACKING UNIT

Plug the power cable into the tracking unit. Confirm the connector is fully seated before securing the unit.




Secure the tracking unit

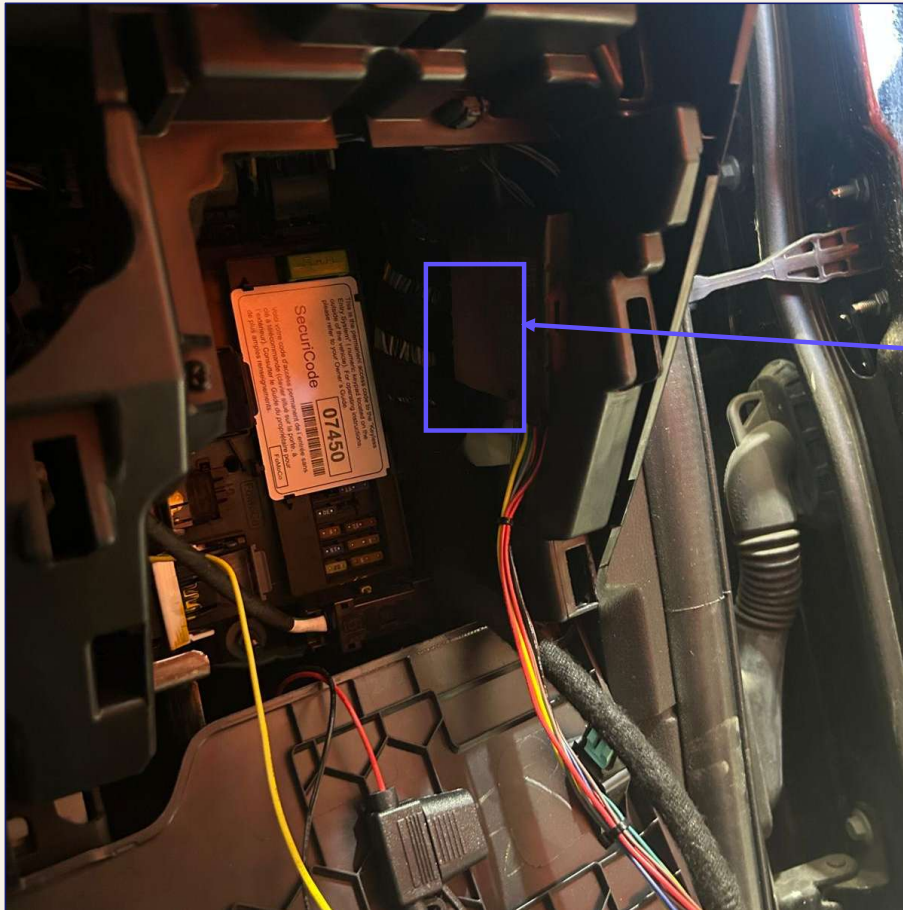

MOUNTING METHOD

Secure the tracking unit to the vehicle using double-sided tape or a cable. Keep it stable and away from moving parts.


Connect buzzer to the 3-pin plug

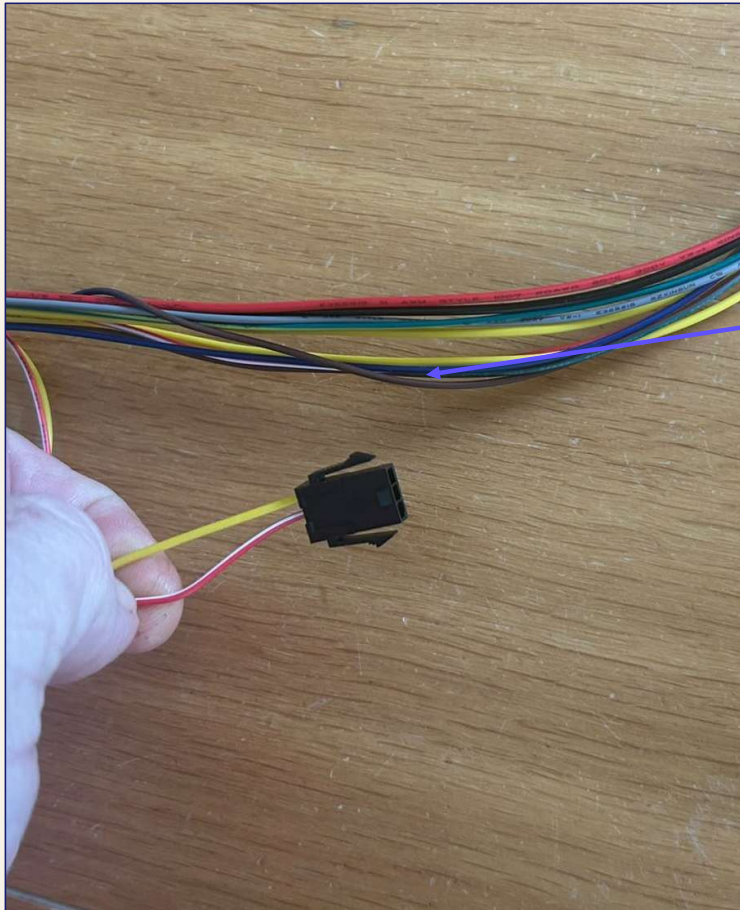

BUZZER CONNECTION

Connect the buzzer to the 3-pin plug on the power cable.


Connect Keypad to the 4-pin plug

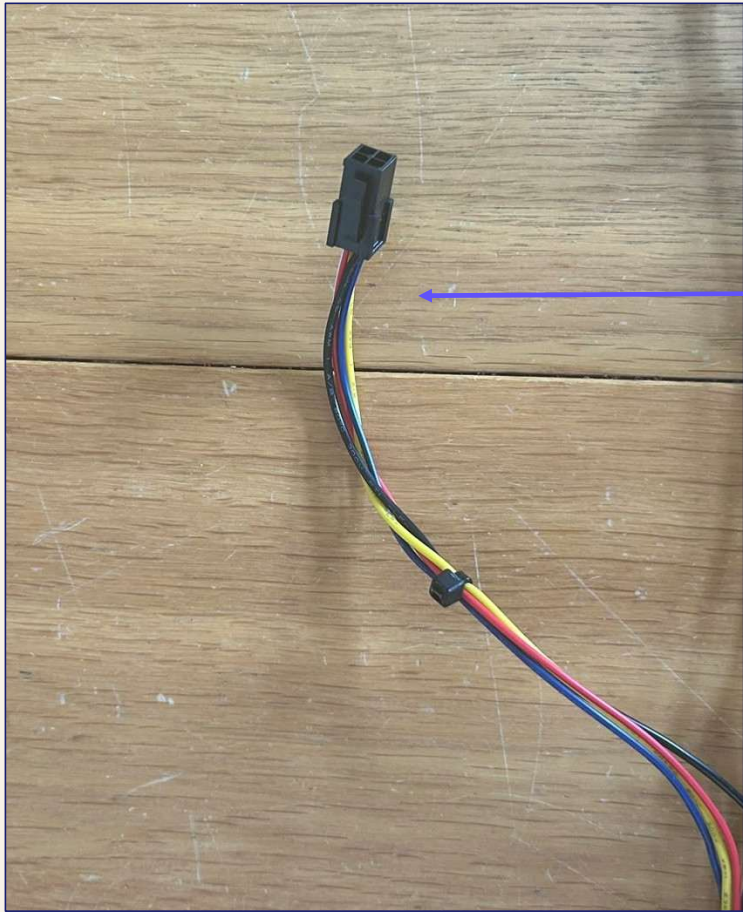

KEYPAD CONNECTION

Connect the Keypad to the 4-pin plug on the power cable.

Final wiring check

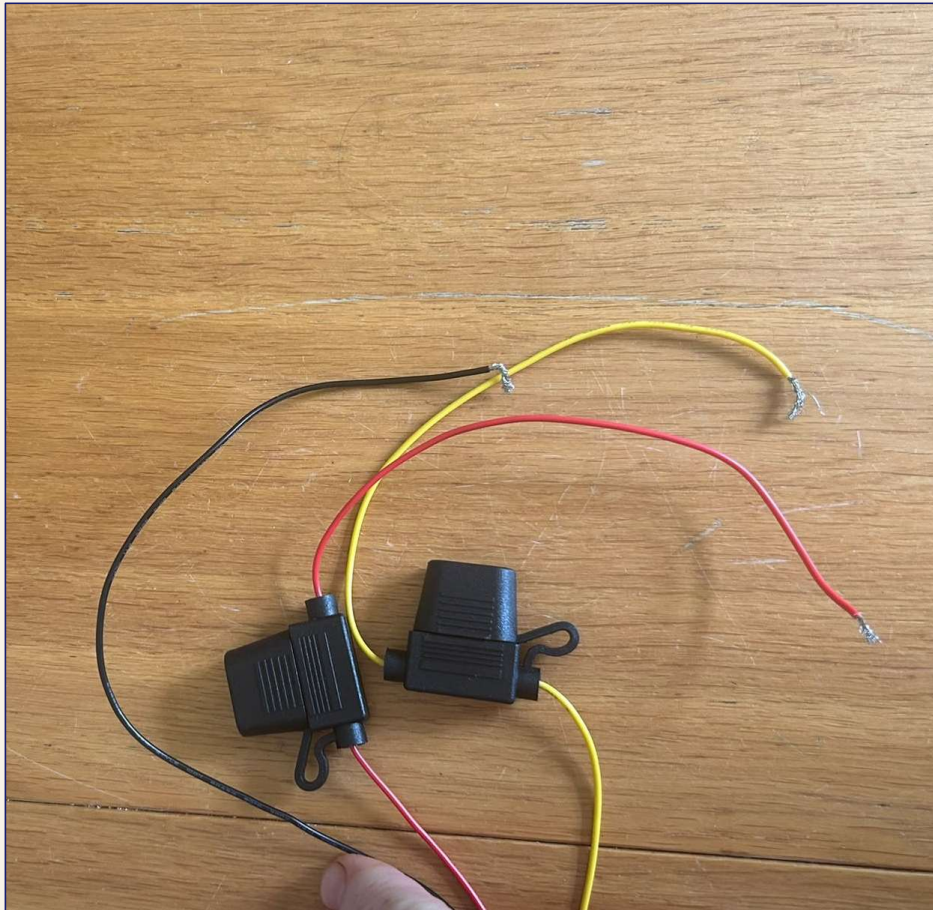

PRE-HANDOVER CHECK

Connect tracker power loom to the vehicle using

- RED - permanent live +
- Yellow – Ignition Live +
- Black – Ground -

Keypad fixed

Buzzer mounted

Power cable seated

Tracking unit secure

motia

Driver ID installation complete

Document the fitting location, confirm driver ID behavior in the portal, and hand over any driver tags or instructions required by the customer.



A better way forward.

